


KEL-EMC | KEL-EMC-Z cable assembly

with shield earthing and integrated strain relief

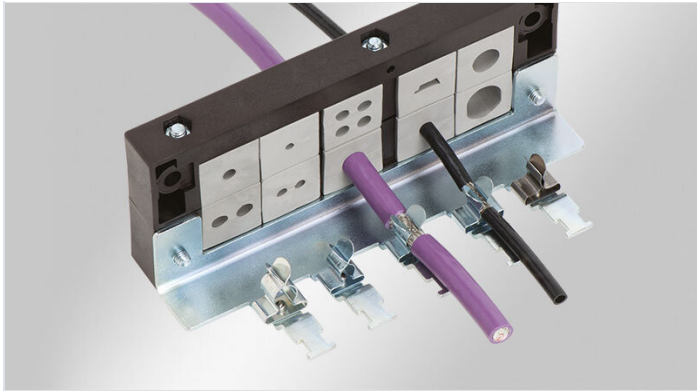

Cable entry, EMC shield earthing and strain relief – all in one location!

Cables pass through the KEL cable entry frame and lead directly to cable shield earthing and strain relief. Three functions carried out quickly and easily!

KEL-EMC-Z: Custom configurations are available for shield clamps up to 16 mm in diameter with minimal order quantities and lead time.



Specifications


Material	Mild steel, galvanically zinc plated Material: Stainless steel
Properties	vibration proof
Mounting options	Screw type mounting

Advantages & benefits

- Großflächige Verbindung der Schirmauflage mit der Gehäusewand - insbesondere bei mit leitendem Lack behandelten Oberflächen
- Befestigung zusammen mit Kabeleinführungsleisten
- Lieferbar auch ohne SKL Schirmklammern für rein zusätzliche Zugentlastung der Kabel
- M6-Anschluss für Masseband bzw. PE-Leiter (KEL-EMV-Z)
- Direkte, einfache und schnelle Kontaktierung mit dem Gehäuse
- Platz sparend, bis zu 10 Leitungen bei zweireihiger Ausführung
- Als Ersatz für EMV Verschraubungen, auch für konfektionierte Kabel

Product types & sizes

KEL-EMC-Z 24|5



Part No.	36527
EAN	4251269303074
PU	1
For no. of shield clamps	5
For max. no. of cables	5
Length L1	147 mm
Length L2	130 mm

Width	56 mm
Height	28 mm
Mounting height	28 mm
Hole size	M5 / M6
No. of screw holes	2
No. of teeth	5
Suitable for cable entry systems:	KEL-ER 24, KEL-ER-E5, KEL 24, KEL-E5, KEL-U 24, KEL-FG-E5, KEL-QUICK 24, KEL-QUICK-E5, KEL-BES 24, KEL-BES-S 24, KEL-DPZ 24, KEL-DPZ-E, KEL-DPU 24

KEL-EMC-Z 16|4

Part No. **36525**
 EAN **4251269303050**
 PU **1**
 For no. of shield clamps **4**
 For max. no. of cables **4**
 Length L1 **120 mm**
 Length L2 **103 mm**

Width **56 mm**
 Height **28 mm**
 Mounting height **28 mm**
 Hole size **M6 / M5**
 No. of screw holes **2**
 No. of teeth **4**
 Suitable for cable entry systems: **KEL-ER 16, KEL-ER-E4, KEL-16, KEL-E4, KEL-U 16, KEL-QUICK 16, KEL-QUICK-E4, KEL-BES 16, KEL-BES-S 16, KEL-DPZ 16**

KEL-EMC 24|5

Part No. **36526**
 EAN **4251269303067**
 PU **5**
 For max. no. of cables **5**
 Length L1 **142 mm**
 Length L2 **130 mm**
 Width **35 mm**

Height **19,5 mm**
 Mounting height **19,5 mm**
 No. of screw holes **2**
 Diam. of screw holes **6 mm**
 No. of teeth **5**
 Suitable for cable entry systems: **KEL-ER 24, KEL-ER-E5, KEL-24, KEL-E5, KEL-U 24, KEL-FG-E5, KEL-QUICK 24, KEL-QUICK-E5, KEL-BES 24, KEL-BES-S 24, KEL-DPZ 24, KEL-DPZ-E, KEL-DPU 24**

KEL-EMC 16|4

Part No. **36524**
 EAN **4251269303043**
 PU **5**
 For max. no. of cables **4**
 Length L1 **115 mm**
 Length L2 **103 mm**
 Width **35 mm**

Height **19,5 mm**
 Mounting height **19,5 mm**
 No. of screw holes **2**
 Diam. of screw holes **6 mm**
 No. of teeth **4**
 Suitable for cable entry systems: **KEL-ER 16, KEL-ER-E4, KEL-16, KEL-E4, KEL-U 16, KEL-QUICK 16, KEL-QUICK-E4, KEL-BES 16, KEL-BES-S 16, KEL-DPZ 16**

KEL-EMC 10

Part No. **36522**
 EAN **4251269303036**
 PU **5**
 For max. no. of cables **3**
 Length L1 **95 mm**
 Length L2 **83 mm**
 Width **35 mm**

Height **19,5 mm**
 Mounting height **19,5 mm**
 No. of screw holes **2**
 Diam. of screw holes **6 mm**
 No. of teeth **3**
 Suitable for cable entry systems: **KEL-ER 10, KEL-ER-E3, KEL-10, KEL-E3, KEL-U 10, KEL-FG-E3, KEL-QUICK 10, KEL-QUICK-E3, KEL-BES 10, KEL-BES-S 10**

KEL-EMC-B

Part No. **36520**
 EAN **4251269303029**
 PU **5**
 For max. no. of cables **2**
 Length L1 **70 mm**
 Length L2 **58 mm**
 Width **35 mm**

Height **19,5 mm**
 Mounting height **19,5 mm**
 No. of screw holes **2**
 Diam. of screw holes **6 mm**
 No. of teeth **2**
 Suitable for cable entry systems: **KEL-ER-B, KEL-ER-E2, KEL-B, KEL-E2, KEL-U-B, KEL-FG-E2, KEL-QUICK-B, KEL-QUICK-E2, KEL-DPZ-B**

KEL-EMC F

Part No. **39110**
EAN **4251269305955**
PU **5**
For max. no. of cables **3**
Length L1 **44 mm**
Length L2 **32 mm**
Width **35 mm**

Height **19,5 mm**
Mounting height **19,5 mm**
No. of screw holes **2**
Diam. of screw holes **6 mm**
No. of teeth **3**
Suitable for cable entry systems: **KEL-ER 24/16/10/-B, KEL
24/16/10/-B, KEL-U 24/16/10/-B,
KEL-QUICK 24/16/10/-B, KEL-
BES 24/16/10, KEL-BES-S
24/16/10, KEL-DPZ 24/16, KEL-
DPU 24**