
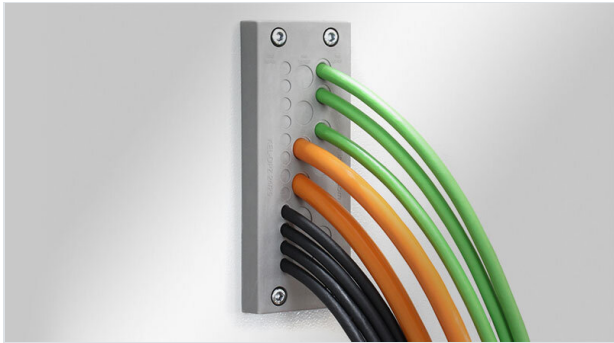


KEL-DPZ CR multi-membrane cable entry plates

for the use in cleanrooms / IP66 / UL Type 12



IP54

IP55

IP64

IP65

IP66

UL TYPE 12

cULus

ENVIRONMENTAL FRIENDLY
ENVIRONMENTAL
ENVIRONMENTAL

RIFA

HL3
EN 45545-2

EN 61373

ECOLAB certified

ISO 4892-2A

EN ISO 14644

PNEUMATICS

RoHS compliant

REACH COMPLIANCE

Made in Germany

KEL-DPZ CR cable entry plates are designed to route and seal a large number cables without connectors, hoses or fibre optics (from 1.5 mm to 22 mm in diameter) in limited space.

The KEL-DPZ CR products are a cost and time saving alternative to traditional cable glands.

The assembly of the KEL-DPZ CR with cables or pneumatic hoses can be done quick and easy. Simply make a small hole in the thin membrane, push the cables through. The KEL-DPZ CR provides strain relief and protection up to IP66 / UL type 12.

The KEL-DPZ CR matches exactly the cut-out dimensions of 6-, 16- and 24-pin standard industrial connectors. The size KEL-DPZ-B CR fits on cut-outs 46 x 46 mm. The very compact size KEL-DPZ-E CR is designed for routing cables in very small space. Through a cut-out of only 18 x 112 mm, up to 21 cables can be easily routed and sealed.

Especially for Rittal KL / KX terminal boxes the size KEL-DPZ-KX/KL CR was created. It was designed for routing up to 72 cables through the pre-cut standard cut-out. The self-tapping screws required for assembly are included in the scope of delivery.

The products with article ending .600 are tested and certified for particle emission for cleanroom class 1 according to ISO 14644-1. The materials used for these products have been tested and certified for outgassing according to VOC/SVOC (ISO 14644-8; ISO 16000-6,-9,-11,-25, VDI 2083 sheet 17).

The products with the article ending .601 are tested and certified for particle emission for cleanroom class 1 according to ISO 14644-1.

Specifications

IP rating (EN 60529)	IP54, IP55, IP64, IP65, IP66
UL Type (UL 50E)	UL Type 12
Material	Elastomer Base frame: Polyamide Base frame: Stainless steel (V2A)
Flame class	UL94-V0, self-extinguishing
Operating temperature	-40 C° to 100 C°
Properties	silicone free, halogen free
Mounting options	Screw type mounting

Advantages & benefits

- Fast mounting
- High cable density
- Certified protection IP66 (acc. to EN 60529)
- Automatic sealing and strain relief for the cable
- Hygienic design - free of dirt-collecting recesses
- Space-saving shape

Product types & sizes

KEL-DPZ 24|14 CR gy

Part No.	43700.601	Height	14 mm
EAN	4251269327315	Mounting height	14 mm
PU	5	Cut-out size	112 x 36 mm
For max. no. of cables	14	No. of screw holes	4
Colour	grau (ähnlich RAL 7035)	Diam. of screw holes	5,9 mm
Length	147 mm	Clamping range	10 x 3.2 - 6.5 mm
Width	58 mm		4 x 16 - 22 mm

KEL-DPZ 24|14 CR (S)VOC gy

Part No.	43700.600	Height	14 mm
EAN	4251269327148	Mounting height	14 mm
PU	5	Cut-out size	112 x 36 mm
For max. no. of cables	14	No. of screw holes	4
Colour	grau (ähnlich RAL 7035)	Diam. of screw holes	5,9 mm
Length	147 mm	Clamping range	10 x 3.2 - 6.5 mm
Width	58 mm		4 x 16 - 22 mm

KEL-DPZ 24|14 CR bk

Part No.	50700.601	Height	14 mm
EAN	4251269327407	Mounting height	14 mm
PU	5	Cut-out size	112 x 36 mm
For max. no. of cables	14	No. of screw holes	4
Colour	schwarz	Diam. of screw holes	5,9 mm
Length	147 mm	Clamping range	10 x 3.2 - 6.5 mm
Width	58 mm		4 x 16 - 22 mm

KEL-DPZ 24|14 CR (S)VOC bk

Part No.	50700.600	Height	14 mm
EAN	4251269327223	Mounting height	14 mm
PU	5	Cut-out size	112 x 36 mm
For max. no. of cables	14	No. of screw holes	4
Colour	schwarz	Diam. of screw holes	5,9 mm
Length	147 mm	Clamping range	10 x 3.2 - 6.5 mm
Width	58 mm		4 x 16 - 22 mm

KEL-DPZ 24|15 CR gy

Part No.	43720.601	Height	14 mm
EAN	4251269327360	Mounting height	14 mm
PU	5	Cut-out size	112 x 36 mm
For max. no. of cables	15	No. of screw holes	4
Colour	grau (ähnlich RAL 7035)	Diam. of screw holes	5,9 mm
Length	147 mm	Clamping range	15 x 7.2 - 12 mm
Width	58 mm		

KEL-DPZ 24|15 CR (S)VOC gy

Part No.	43720.600	Height	14 mm
EAN	4251269327186	Mounting height	14 mm
PU	5	Cut-out size	112 x 36 mm
For max. no. of cables	15	No. of screw holes	4
Colour	grau (ähnlich RAL 7035)	Diam. of screw holes	5,9 mm
Length	147 mm	Clamping range	15 x 7.2 - 12 mm
Width	58 mm		

KEL-DPZ 24|15 CR bk

Part No.	50720.601	Height	14 mm
EAN	4251269327452	Mounting height	14 mm
PU	5	Cut-out size	112 x 36 mm
For max. no. of cables	15	No. of screw holes	4
Colour	schwarz	Diam. of screw holes	5,9 mm
Length	147 mm	Clamping range	15 x 7.2 - 12 mm
Width	58 mm		

KEL-DPZ 24|15 CR (S)VOC bk

Part No.	50720.600	Height	14 mm
EAN	4251269327278	Mounting height	14 mm
PU	5	Cut-out size	112 x 36 mm
For max. no. of cables	15	No. of screw holes	4
Colour	schwarz	Diam. of screw holes	5,9 mm
Length	147 mm	Clamping range	15 x 7.2 - 12 mm
Width	58 mm		

KEL-DPZ 24|16 CR gy

Part No.	43725.601	Height	14 mm
EAN	4251269327377	Mounting height	14 mm
PU	5	Cut-out size	112 x 36 mm
For max. no. of cables	16	No. of screw holes	4
Colour	grau (ähnlich RAL 7035)	Diam. of screw holes	5,9 mm
Length	147 mm	Clamping range	8 x 3.2 - 6.5 mm
Width	58 mm		4 x 5 - 9.7 mm
			2 x 9 - 16.2 mm
			2 x 16 - 22 mm

KEL-DPZ 24|16 CR (S)VOC gy

Part No.	43725.600	Height	14 mm
EAN	4251269327193	Mounting height	14 mm
PU	5	Cut-out size	112 x 36 mm
For max. no. of cables	16	No. of screw holes	4
Colour	grau (ähnlich RAL 7035)	Diam. of screw holes	5,9 mm
Length	147 mm	Clamping range	8 x 3.2 - 6.5 mm
Width	58 mm		4 x 5 - 9.7 mm
			2 x 9 - 16.2 mm
			2 x 16 - 22 mm

KEL-DPZ 24|16 CR bk

Part No.	50725.601	Height	14 mm
EAN	4251269327469	Mounting height	14 mm
PU	5	Cut-out size	112 x 36 mm
For max. no. of cables	16	No. of screw holes	4
Colour	schwarz	Diam. of screw holes	5,9 mm
Length	147 mm	Clamping range	8 x 3.2 - 6.5 mm
Width	58 mm		4 x 5 - 9.7 mm
			2 x 9 - 16.2 mm
			2 x 16 - 22 mm

**KEL-DPZ 24|16 CR
(S)VOC bk**

Part No.	50725.600	Height	14 mm
EAN	4251269327285	Mounting height	14 mm
PU	5	Cut-out size	112 x 36 mm
For max. no. of cables	16	No. of screw holes	4
Colour	schwarz	Diam. of screw holes	5,9 mm
Length	147 mm	Clamping range	8 x 3.2 - 6.5 mm
Width	58 mm		4 x 5 - 9.7 mm
			2 x 9 - 16.2 mm
			2 x 16 - 22 mm

KEL-DPZ 24|17 CR gy

Part No.	43705.601	Height	14 mm
EAN	4251269327322	Mounting height	14 mm
PU	5	Cut-out size	112 x 36 mm
For max. no. of cables	17	No. of screw holes	4
Colour	grau (ähnlich RAL 7035)	Diam. of screw holes	5,9 mm
Length	147 mm	Clamping range	6 x 3.2 - 6.5 mm
Width	58 mm		6 x 5 - 10.2 mm
			5 x 9 - 16.2 mm

**KEL-DPZ 24|17 CR
(S)VOC gy**

Part No.	43705.600	Height	14 mm
EAN	4251269325458	Mounting height	14 mm
PU	5	Cut-out size	112 x 36 mm
For max. no. of cables	17	No. of screw holes	4
Colour	grau (ähnlich RAL 7035)	Diam. of screw holes	5,9 mm
Length	147 mm	Clamping range	6 x 3.2 - 6.5 mm
Width	58 mm		6 x 5 - 10.2 mm
			5 x 9 - 16.2 mm

KEL-DPZ 24|17 CR bk

Part No.	50705.601	Height	14 mm
EAN	4251269327414	Mounting height	14 mm
PU	5	Cut-out size	112 x 36 mm
For max. no. of cables	17	No. of screw holes	4
Colour	schwarz	Diam. of screw holes	5,9 mm
Length	147 mm	Clamping range	6 x 3.2 - 6.5 mm
Width	58 mm		6 x 5 - 10.2 mm
			5 x 9 - 16.2 mm

**KEL-DPZ 24|17 CR
(S)VOC bk**

Part No.	50705.600	Height	14 mm
EAN	4251269327230	Mounting height	14 mm
PU	5	Cut-out size	112 x 36 mm
For max. no. of cables	17	No. of screw holes	4
Colour	schwarz	Diam. of screw holes	5,9 mm
Length	147 mm	Clamping range	6 x 3.2 - 6.5 mm
Width	58 mm		6 x 5 - 10.2 mm
			5 x 9 - 16.2 mm

KEL-DPZ 24|25 CR gy

Part No.	43710.601	Height	14 mm
EAN	4251269327339	Mounting height	14 mm
PU	5	Cut-out size	112 x 36 mm
For max. no. of cables	25	No. of screw holes	4
Colour	grau (ähnlich RAL 7035)	Diam. of screw holes	5,9 mm
Length	147 mm	Clamping range	12 x 3.2 - 6.5 mm
Width	58 mm		7 x 4.8 - 9.7 mm 6 x 7.5 - 12 mm

KEL-DPZ 24|25 CR (S)VOC gy

Part No.	43710.600	Height	14 mm
EAN	4251269327155	Mounting height	14 mm
PU	5	Cut-out size	112 x 36 mm
For max. no. of cables	25	No. of screw holes	4
Colour	grau (ähnlich RAL 7035)	Diam. of screw holes	5,9 mm
Length	147 mm	Clamping range	12 x 3.2 - 6.5 mm
Width	58 mm		7 x 4.8 - 9.7 mm 6 x 7.5 - 12 mm

KEL-DPZ 24|25 CR bk

Part No.	50710.601	Height	14 mm
EAN	4251269327421	Mounting height	14 mm
PU	5	Cut-out size	112 x 36 mm
For max. no. of cables	25	No. of screw holes	4
Colour	schwarz	Diam. of screw holes	5,9 mm
Length	147 mm	Clamping range	12 x 3.2 - 6.5 mm
Width	58 mm		7 x 4.8 - 9.7 mm 6 x 7.5 - 12 mm

KEL-DPZ 24|25 CR (S)VOC bk

Part No.	50710.600	Height	14 mm
EAN	4251269327247	Mounting height	14 mm
PU	5	Cut-out size	112 x 36 mm
For max. no. of cables	25	No. of screw holes	4
Colour	schwarz	Diam. of screw holes	5,9 mm
Length	147 mm	Clamping range	12 x 3.2 - 6.5 mm
Width	58 mm		7 x 4.8 - 9.7 mm 6 x 7.5 - 12 mm

KEL-DPZ 24|26 CR gy

Part No.	43711.601	Height	14 mm
EAN	4251269327346	Mounting height	14 mm
PU	5	Cut-out size	112 x 36 mm
For max. no. of cables	26	No. of screw holes	4
Colour	grau (ähnlich RAL 7035)	Diam. of screw holes	5,9 mm
Length	147 mm	Clamping range	26 x 5 - 10.2 mm
Width	58 mm		

KEL-DPZ 24|26 CR (S)VOC gy

Part No.	43711.600	Height	14 mm
EAN	4251269327162	Mounting height	14 mm
PU	5	Cut-out size	112 x 36 mm
For max. no. of cables	26	No. of screw holes	4
Colour	grau (ähnlich RAL 7035)	Diam. of screw holes	5,9 mm
Length	147 mm	Clamping range	26 x 5 - 10.2 mm
Width	58 mm		

KEL-DPZ 24|26 CR bk

Part No.	50711.601	Height	14 mm
EAN	4251269327438	Mounting height	14 mm
PU	5	Cut-out size	112 x 36 mm
For max. no. of cables	26	No. of screw holes	4
Colour	schwarz	Diam. of screw holes	5,9 mm
Length	147 mm	Clamping range	26 x 5 - 10.2 mm
Width	58 mm		

KEL-DPZ 24|26 CR (S)VOC bk

Part No.	50711.600	Height	14 mm
EAN	4251269327254	Mounting height	14 mm
PU	5	Cut-out size	112 x 36 mm
For max. no. of cables	26	No. of screw holes	4
Colour	schwarz	Diam. of screw holes	5,9 mm
Length	147 mm	Clamping range	26 x 5 - 10.2 mm
Width	58 mm		

KEL-DPZ 24|32 CR gy

Part No.	43730.601	Height	14 mm
EAN	4251269327384	Mounting height	14 mm
PU	5	Cut-out size	112 x 36 mm
For max. no. of cables	32	No. of screw holes	4
Colour	grau (ähnlich RAL 7035)	Diam. of screw holes	5,9 mm
Length	147 mm	Clamping range	21 x 3.2 - 6.5 mm
Width	58 mm		8 x 5 - 10.2 mm
			3 x 7.5 - 12 mm

KEL-DPZ 24|32 CR (S)VOC gy

Part No.	43730.600	Height	14 mm
EAN	4251269327209	Mounting height	14 mm
PU	5	Cut-out size	112 x 36 mm
For max. no. of cables	32	No. of screw holes	4
Colour	grau (ähnlich RAL 7035)	Diam. of screw holes	5,9 mm
Length	147 mm	Clamping range	21 x 3.2 - 6.5 mm
Width	58 mm		8 x 5 - 10.2 mm
			3 x 7.5 - 12 mm

KEL-DPZ 24|32 CR bk

Part No.	50730.601	Height	14 mm
EAN	4251269327476	Mounting height	14 mm
PU	5	Cut-out size	112 x 36 mm
For max. no. of cables	32	No. of screw holes	4
Colour	schwarz	Diam. of screw holes	5,9 mm
Length	147 mm	Clamping range	21 x 3.2 - 6.5 mm
Width	58 mm		8 x 5 - 10.2 mm
			3 x 7.5 - 12 mm

KEL-DPZ 24|32 CR (S)VOC bk

Part No.	50730.600	Height	14 mm
EAN	4251269327292	Mounting height	14 mm
PU	5	Cut-out size	112 x 36 mm
For max. no. of cables	32	No. of screw holes	4
Colour	schwarz	Diam. of screw holes	5,9 mm
Length	147 mm	Clamping range	21 x 3.2 - 6.5 mm
Width	58 mm		8 x 5 - 10.2 mm
			3 x 7.5 - 12 mm

KEL-DPZ 24|42 CR gy

Part No.	43715.601	Height	14 mm
EAN	4251269327353	Mounting height	14 mm
PU	5	Cut-out size	112 x 36 mm
For max. no. of cables	42	No. of screw holes	4
Colour	grau (ähnlich RAL 7035)	Diam. of screw holes	5,9 mm
Length	147 mm	Clamping range	42 x 3.2 - 6.5 mm
Width	58 mm		

KEL-DPZ 24|42 CR (S)VOC gy

Part No.	43715.600	Height	14 mm
EAN	4251269327179	Mounting height	14 mm
PU	5	Cut-out size	112 x 36 mm
For max. no. of cables	42	No. of screw holes	4
Colour	grau (ähnlich RAL 7035)	Diam. of screw holes	5,9 mm
Length	147 mm	Clamping range	42 x 3.2 - 6.5 mm
Width	58 mm		

KEL-DPZ 24|42 CR bk

Part No.	50715.601	Height	14 mm
EAN	4251269327445	Mounting height	14 mm
PU	5	Cut-out size	112 x 36 mm
For max. no. of cables	42	No. of screw holes	4
Colour	schwarz	Diam. of screw holes	5,9 mm
Length	147 mm	Clamping range	42 x 3.2 - 6.5 mm
Width	58 mm		

KEL-DPZ 24|42 CR (S)VOC bk

Part No.	50715.600	Height	14 mm
EAN	4251269327261	Mounting height	14 mm
PU	5	Cut-out size	112 x 36 mm
For max. no. of cables	42	No. of screw holes	4
Colour	schwarz	Diam. of screw holes	5,9 mm
Length	147 mm	Clamping range	42 x 3.2 - 6.5 mm
Width	58 mm		

KEL-DPZ 24|121 CR gy

Part No.	43735.601	Height	14 mm
EAN	4251269327391	Mounting height	14 mm
PU	5	Cut-out size	112 x 36 mm
For max. no. of cables	121	No. of screw holes	4
Colour	grau (ähnlich RAL 7035)	Diam. of screw holes	5,9 mm
Length	147 mm	Clamping range	119 x 1.5 - 2.6 mm
Width	58 mm		2 x 2.5 - 5 mm

KEL-DPZ 24|121 CR (S)VOC gy

Part No.	43735.600	Height	14 mm
EAN	4251269327216	Mounting height	14 mm
PU	5	Cut-out size	112 x 36 mm
For max. no. of cables	121	No. of screw holes	4
Colour	grau (ähnlich RAL 7035)	Diam. of screw holes	5,9 mm
Length	147 mm	Clamping range	119 x 1.5 - 2.6 mm
Width	58 mm		2 x 2.5 - 5 mm

KEL-DPZ 24|121 CR bk

Part No.	50735.601	Height	14 mm
EAN	4251269327483	Mounting height	14 mm
PU	5	Cut-out size	112 x 36 mm
For max. no. of cables	121	No. of screw holes	4
Colour	schwarz	Diam. of screw holes	5,9 mm
Length	147 mm	Clamping range	119 x 1.5 - 2.6 mm
Width	58 mm		2 x 2.5 - 5 mm

KEL-DPZ 24|121 CR (S)VOC bk

Part No.	50735.600	Height	14 mm
EAN	4251269327308	Mounting height	14 mm
PU	5	Cut-out size	112 x 36 mm
For max. no. of cables	121	No. of screw holes	4
Colour	schwarz	Diam. of screw holes	5,9 mm
Length	147 mm	Clamping range	119 x 1.5 - 2.6 mm
Width	58 mm		2 x 2.5 - 5 mm

KEL-DPZ 16|11 CR gy

Part No.	43815.601	Height	14 mm
EAN	4251269327643	Mounting height	14 mm
PU	5	Cut-out size	86 x 36 mm
For max. no. of cables	16	No. of screw holes	4
Colour	grau (ähnlich RAL 7035)	Diam. of screw holes	5,8 mm
Length	120 mm	Clamping range	11 x 7.5 - 12 mm
Width	58 mm		

KEL-DPZ 16|11 CR (S)VOC gy

Part No.	43815.600	Height	14 mm
EAN	4251269327544	Mounting height	14 mm
PU	5	Cut-out size	86 x 36 mm
For max. no. of cables	16	No. of screw holes	4
Colour	grau (ähnlich RAL 7035)	Diam. of screw holes	5,8 mm
Length	120 mm	Clamping range	11 x 7.5 - 12 mm
Width	58 mm		

KEL-DPZ 16|14 CR gy

Part No.	43816.601	Height	14 mm
EAN	4251269327650	Mounting height	14 mm
PU	5	Cut-out size	86 x 36 mm
For max. no. of cables	14	No. of screw holes	4
Colour	grau (ähnlich RAL 7035)	Diam. of screw holes	5,8 mm
Length	120 mm	Clamping range	5 x 3.2 - 6.5 mm
Width	58 mm		5 x 5 - 10.2 mm
			4 x 9 - 16.2 mm

KEL-DPZ 16|14 CR (S)VOC gy

Part No.	43816.600	Height	14 mm
EAN	4251269327551	Mounting height	14 mm
PU	5	Cut-out size	86 x 36 mm
For max. no. of cables	14	No. of screw holes	4
Colour	grau (ähnlich RAL 7035)	Diam. of screw holes	5,8 mm
Length	120 mm	Clamping range	5 x 3.2 - 6.5 mm
Width	58 mm		5 x 5 - 10.2 mm
			4 x 9 - 16.2 mm

KEL-DPZ 16|20 CR gy

Part No.	43817.601	Height	14 mm
EAN	4251269327667	Mounting height	14 mm
PU	5	Cut-out size	86 x 36 mm
For max. no. of cables	20	No. of screw holes	4
Colour	grau (ähnlich RAL 7035)	Diam. of screw holes	5,8 mm
Length	120 mm	Clamping range	11 x 3.2 - 6.5 mm
Width	58 mm		5 x 5 - 10.2 mm 4 x 7.5 - 12 mm

KEL-DPZ 16|20 CR (S)VOC gy

Part No.	43817.600	Height	14 mm
EAN	4251269327568	Mounting height	14 mm
PU	5	Cut-out size	86 x 36 mm
For max. no. of cables	20	No. of screw holes	4
Colour	grau (ähnlich RAL 7035)	Diam. of screw holes	5,8 mm
Length	120 mm	Clamping range	11 x 3.2 - 6.5 mm
Width	58 mm		5 x 5 - 10.2 mm 4 x 7.5 - 12 mm

KEL-DPZ 16|25 CR gy

Part No.	43818.601	Height	14 mm
EAN	4251269327674	Mounting height	14 mm
PU	5	Cut-out size	86 x 36 mm
For max. no. of cables	25	No. of screw holes	4
Colour	grau (ähnlich RAL 7035)	Diam. of screw holes	5,8 mm
Length	120 mm	Clamping range	16 x 3.2 - 6.5 mm
Width	58 mm		6 x 5 - 10.2 mm 3 x 7.5 - 12 mm

KEL-DPZ 16|25 CR (S)VOC gy

Part No.	43818.600	Height	14 mm
EAN	4251269327575	Mounting height	14 mm
PU	5	Cut-out size	86 x 36 mm
For max. no. of cables	25	No. of screw holes	4
Colour	grau (ähnlich RAL 7035)	Diam. of screw holes	5,8 mm
Length	120 mm	Clamping range	16 x 3.2 - 6.5 mm
Width	58 mm		6 x 5 - 10.2 mm 3 x 7.5 - 12 mm

KEL-DPZ 16|34 CR gy

Part No.	43819.601	Height	14 mm
EAN	4251269327681	Mounting height	14 mm
PU	5	Cut-out size	86 x 36 mm
For max. no. of cables	34	No. of screw holes	4
Colour	grau (ähnlich RAL 7035)	Diam. of screw holes	5,8 mm
Length	120 mm	Clamping range	34 x 3.2 - 6.5 mm
Width	58 mm		

KEL-DPZ 16|34 CR (S)VOC gy


Part No.	43819.600	Height	14 mm
EAN	4251269327582	Mounting height	14 mm
PU	5	Cut-out size	86 x 36 mm
For max. no. of cables	34	No. of screw holes	4
Colour	grau (ähnlich RAL 7035)	Diam. of screw holes	5,8 mm
Length	120 mm	Clamping range	34 x 3.2 - 6.5 mm
Width	58 mm		

KEL-DPZ 6|12 CR gy

Part No.	43809.601	Height	7,5 mm
EAN	4251269327599	Mounting height	7,5 mm
PU	5	Cut-out size	52 x 36 mm
For max. no. of cables	12	No. of screw holes	4
Colour	grau (ähnlich RAL 7035)	Diam. of screw holes	4,5
Length	85,5 mm	Clamping range	12 x 4.5 - 8 mm
Width	54 mm		

KEL-DPZ 6|12 CR (S)VOC gy

Part No.	43809.600	Height	7,5 mm
EAN	4251269327490	Mounting height	7,5 mm
PU	5	Cut-out size	52 x 36 mm
For max. no. of cables	12	No. of screw holes	4
Colour	grau (ähnlich RAL 7035)	Diam. of screw holes	4,5
Length	85,5 mm	Clamping range	12 x 4.5 - 8 mm
Width	54 mm		

KEL-DPZ 6|18 CR gy

Part No.	43812.601	Height	7,5 mm
EAN	4251269327612	Mounting height	7,5 mm
PU	5	Cut-out size	52 x 36 mm
For max. no. of cables	18	No. of screw holes	4
Colour	grau (ähnlich RAL 7035)	Diam. of screw holes	4,5
Length	85,5 mm	Clamping range	7 x 4.5 - 8 mm
Width	54 mm		5 x 3.2 - 6.5 mm 6 x 2.5 - 5 mm

KEL-DPZ 6|18 CR (S)VOC gy

Part No.	43812.600	Height	7,5 mm
EAN	4251269327513	Mounting height	7,5 mm
PU	5	Cut-out size	52 x 36 mm
For max. no. of cables	18	No. of screw holes	4
Colour	grau (ähnlich RAL 7035)	Diam. of screw holes	4,5
Length	85,5 mm	Clamping range	7 x 4.5 - 8 mm
Width	54 mm		5 x 3.2 - 6.5 mm 6 x 2.5 - 5 mm

KEL-DPZ 6|18-1 CR gy

Part No.	43811.601	Height	7,5 mm
EAN	4251269327605	Mounting height	7,5 mm
PU	5	Cut-out size	52 x 36 mm
For max. no. of cables	18	No. of screw holes	4
Colour	grau (ähnlich RAL 7035)	Diam. of screw holes	4,5
Length	85,5 mm	Clamping range	18 x 3.2 - 6.5 mm
Width	54 mm		

KEL-DPZ 6|18-1 CR (S)VOC gy

Part No.	43811.600	Height	7,5 mm
EAN	4251269327506	Mounting height	7,5 mm
PU	5	Cut-out size	52 x 36 mm
For max. no. of cables	18	No. of screw holes	4
Colour	grau (ähnlich RAL 7035)	Diam. of screw holes	4,5
Length	85,5 mm	Clamping range	18 x 3.2 - 6.5 mm
Width	54 mm		

KEL-DPZ 6|23 CR gy

Part No.	43813.601	Height	7,5 mm
EAN	4251269327629	Mounting height	7,5 mm
PU	5	Cut-out size	52 x 36 mm
For max. no. of cables	23	No. of screw holes	4
Colour	grau (ähnlich RAL 7035)	Diam. of screw holes	4,5
Length	85,5 mm	Clamping range	10 x 3.2 - 6.5 mm
Width	54 mm		13 x 2.5 - 5 mm

KEL-DPZ 6|23 CR (S)VOC gy


Part No.	43813.600	Height	7,5 mm
EAN	4251269327520	Mounting height	7,5 mm
PU	5	Cut-out size	52 x 36 mm
For max. no. of cables	23	No. of screw holes	4
Colour	grau (ähnlich RAL 7035)	Diam. of screw holes	4,5
Length	85,5 mm	Clamping range	10 x 3.2 - 6.5 mm
Width	54 mm		13 x 2.5 - 5 mm

KEL-DPZ 6|27 CR gy


Part No.	43814.601	Height	7,5 mm
EAN	4251269327636	Mounting height	7,5 mm
PU	5	Cut-out size	52 x 36 mm
For max. no. of cables	27	No. of screw holes	4
Colour	grau (ähnlich RAL 7035)	Diam. of screw holes	4,5
Length	85,5 mm	Clamping range	27 x 2.5 - 5 mm
Width	54 mm		

KEL-DPZ 6|27 CR (S)VOC gy


Part No.	43814.600	Height	7,5 mm
EAN	4251269327537	Mounting height	7,5 mm
PU	5	Cut-out size	52 x 36 mm
For max. no. of cables	27	No. of screw holes	4
Colour	grau (ähnlich RAL 7035)	Diam. of screw holes	4,5
Length	85,5 mm	Clamping range	27 x 2.5 - 5 mm
Width	54 mm		

KEL-DPZ-B 13 CR gy


Part No.	43794.601	Height	10 mm
EAN	4251269327834	Mounting height	10 mm
PU	5	Cut-out size	46 x 46 mm
For max. no. of cables	13	No. of screw holes	4
Colour	grau (ähnlich RAL 7035)	Diam. of screw holes	5,7 mm
Length	72,8 mm	Clamping range	8 x 3.2 - 6.5 mm
Width	58 mm		4 x 5 - 10.2 mm
			1 x 16 - 22 mm

KEL-DPZ-B 13 CR (S)VOC gy


Part No.	43794.600	Height	10 mm
EAN	4251269327711	Mounting height	10 mm
PU	5	Cut-out size	46 x 46 mm
For max. no. of cables	13	No. of screw holes	4
Colour	grau (ähnlich RAL 7035)	Diam. of screw holes	5,7 mm
Length	72,8 mm	Clamping range	8 x 3.2 - 6.5 mm
Width	58 mm		4 x 5 - 10.2 mm
			1 x 16 - 22 mm

KEL-DPZ-B 13 CR bk


Part No.	50794.601	Height	10 mm
EAN	4251269327889	Mounting height	10 mm
PU	5	Cut-out size	46 x 46 mm
For max. no. of cables	13	No. of screw holes	4
Colour	schwarz	Diam. of screw holes	5,7 mm
Length	72,8 mm	Clamping range	8 x 3.2 - 6.5 mm
Width	58 mm		4 x 5 - 10.2 mm
			1 x 16 - 22 mm

KEL-DPZ-B 13 CR (S)VOC bk


Part No.	50794.600	Height	10 mm
EAN	4251269327766	Mounting height	10 mm
PU	5	Cut-out size	46 x 46 mm
For max. no. of cables	13	No. of screw holes	4
Colour	schwarz	Diam. of screw holes	5,7 mm
Length	72,8 mm	Clamping range	8 x 3.2 - 6.5 mm
Width	58 mm		4 x 5 - 10.2 mm
			1 x 16 - 22 mm

KEL-DPZ-B 17 CR gy


Part No.	43796.601	Height	10 mm
EAN	4251269327841	Mounting height	10 mm
PU	5	Cut-out size	46 x 46 mm
For max. no. of cables	17	No. of screw holes	4
Colour	grau (ähnlich RAL 7035)	Diam. of screw holes	5,7 mm
Length	72,8 mm	Clamping range	10 x 3.2 - 6.5 mm
Width	58 mm		4 x 5 - 10.2 mm
			2 x 7.5 - 12 mm
			1 x 9 - 16.2 mm

KEL-DPZ-B 17 CR (S)VOC gy


Part No.	43796.600	Height	10 mm
EAN	4251269327728	Mounting height	10 mm
PU	5	Cut-out size	46 x 46 mm
For max. no. of cables	17	No. of screw holes	4
Colour	grau (ähnlich RAL 7035)	Diam. of screw holes	5,7 mm
Length	72,8 mm	Clamping range	10 x 3.2 - 6.5 mm
Width	58 mm		4 x 5 - 10.2 mm
			2 x 7.5 - 12 mm
			1 x 9 - 16.2 mm

KEL-DPZ-B 17 CR bk


Part No.	50796.601	Height	10 mm
EAN	4251269327896	Mounting height	10 mm
PU	5	Cut-out size	46 x 46 mm
For max. no. of cables	17	No. of screw holes	4
Colour	schwarz	Diam. of screw holes	5,7 mm
Length	72,8 mm	Clamping range	10 x 3.2 - 6.5 mm
Width	58 mm		4 x 5 - 10.2 mm
			2 x 7.5 - 12 mm
			1 x 9 - 16.2 mm

**KEL-DPZ-B 17 CR
(S)VOC bk**


Part No.	50796.600	Height	10 mm
EAN	4251269327773	Mounting height	10 mm
PU	5	Cut-out size	46 x 46 mm
For max. no. of cables	17	No. of screw holes	4
Colour	schwarz	Diam. of screw holes	5,7 mm
Length	72,8 mm	Clamping range	10 x 3.2 - 6.5 mm
Width	58 mm		4 x 5 - 10.2 mm
			2 x 7.5 - 12 mm
			1 x 9 - 16.2 mm

KEL-DPZ-B 25 CR gy


Part No.	43798.601	Height	10 mm
EAN	4251269327858	Mounting height	10 mm
PU	5	Cut-out size	46 x 46 mm
For max. no. of cables	25	No. of screw holes	4
Colour	grau (ähnlich RAL 7035)	Diam. of screw holes	5,7 mm
Length	72,8 mm	Clamping range	25 x 3.2 - 6.5 mm
Width	58 mm		

**KEL-DPZ-B 25 CR
(S)VOC gy**

Part No.	43798.600	Height	10 mm
EAN	4251269327735	Mounting height	10 mm
PU	5	Cut-out size	46 x 46 mm
For max. no. of cables	25	No. of screw holes	4
Colour	grau (ähnlich RAL 7035)	Diam. of screw holes	5,7 mm
Length	72,8 mm	Clamping range	25 x 3.2 - 6.5 mm
Width	58 mm		

KEL-DPZ-B 25 CR bk


Part No.	50798.601	Height	10 mm
EAN	4251269327902	Mounting height	10 mm
PU	5	Cut-out size	46 x 46 mm
For max. no. of cables	25	No. of screw holes	4
Colour	schwarz	Diam. of screw holes	5,7 mm
Length	72,8 mm	Clamping range	25 x 3.2 - 6.5 mm
Width	58 mm		


**KEL-DPZ-B 25 CR
(S)VOC bk**


Part No.	50798.600	Height	10 mm
EAN	4251269327780	Mounting height	10 mm
PU	5	Cut-out size	46 x 46 mm
For max. no. of cables	25	No. of screw holes	4
Colour	schwarz	Diam. of screw holes	5,7 mm
Length	72,8 mm	Clamping range	25 x 3.2 - 6.5 mm
Width	58 mm		


KEL-DPZ-E 112|7 CR gy


Part No.	43780.601	Height	14 mm
EAN	4251269327810	Mounting height	14 mm
PU	5	No. of screw holes	2
For max. no. of cables	7	Diam. of screw holes	5,7 mm
Colour	grau (ähnlich RAL 7035)	Clamping range	7 x 7.5 - 12 mm
Length	147 mm		
Width	29 mm		


KEL-DPZ-E 112 7 CR (S)VOC gy 	Part No.	43780.600	Height	14 mm
	EAN	4251269327698	Mounting height	14 mm
	PU	5	No. of screw holes	2
	For max. no. of cables	7	Diam. of screw holes	5,7 mm
	Colour	grau (ähnlich RAL 7035)	Clamping range	7 x 7.5 - 12 mm
	Length	147 mm		
	Width	29 mm		

KEL-DPZ-E 112 7 CR bk 	Part No.	50780.601	Height	14 mm
	EAN	4251269327865	Mounting height	14 mm
	PU	5	No. of screw holes	2
	For max. no. of cables	7	Diam. of screw holes	5,7 mm
	Colour	schwarz	Clamping range	7 x 7.5 - 12 mm
	Length	147 mm		
	Width	29 mm		

KEL-DPZ-E 112 7 CR (S)VOC bk 	Part No.	50780.600	Height	14 mm
	EAN	4251269327742	Mounting height	14 mm
	PU	5	No. of screw holes	2
	For max. no. of cables	7	Diam. of screw holes	5,7 mm
	Colour	schwarz	Clamping range	7 x 7.5 - 12 mm
	Length	147 mm		
	Width	29 mm		

KEL-DPZ-E 112 21 CR gy 	Part No.	43790.601	Height	14 mm
	EAN	4251269327827	Mounting height	14 mm
	PU	5	No. of screw holes	2
	For max. no. of cables	21	Diam. of screw holes	5,7 mm
	Colour	grau (ähnlich RAL 7035)	Clamping range	21 x 3.2 - 6.5 mm
	Length	147 mm		
	Width	29 mm		


KEL-DPZ-E 112 21 CR (S)VOC gy 	Part No.	43790.600	Height	14 mm
	EAN	4251269327704	Mounting height	14 mm
	PU	5	No. of screw holes	2
	For max. no. of cables	21	Diam. of screw holes	5,7 mm
	Colour	grau (ähnlich RAL 7035)	Clamping range	21 x 3.2 - 6.5 mm
	Length	147 mm		
	Width	29 mm		

KEL-DPZ-E 112 21 CR bk 	Part No.	50790.601	Height	14 mm
	EAN	4251269327872	Mounting height	14 mm
	PU	5	No. of screw holes	2
	For max. no. of cables	21	Diam. of screw holes	5,7 mm
	Colour	schwarz	Clamping range	21 x 3.2 - 6.5 mm
	Length	147 mm		
	Width	29 mm		

**KEL-DPZ-E 112|21 CR
(S)VOC bk**

Part No. **50790.600**
 EAN **4251269327759**
 PU **5**
 For max. no. of cables **21**
 Colour **schwarz**
 Length **147 mm**
 Width **29 mm**

Height **14 mm**
 Mounting height **14 mm**
 No. of screw holes **2**
 Diam. of screw holes **5,7 mm**
 Clamping range **21 x 3.2 - 6.5 mm**

**KEL-DPZ-KX/KL 72 CR
gy**

Part No. **43675.001.601**
 EAN **4251269327919**
 PU **1**
 For max. no. of cables **72**
 Colour **grau (ähnlich RAL 7035)**
 Length **221 mm**
 Width **90 mm**

Height **4 mm**
 Mounting height **4 mm**
 Cut-out size **192 x 62 mm**
 No. of screw holes **6**
 Diam. of screw holes **5,1 mm**
 Clamping range **42 x 3.2 - 6.5 mm**
21 x 5 - 10.2 mm
6 x 9 - 16.2 mm
3 x 16 - 22 mm

**KEL-DPZ-KX/KL 72 CR
(S)VOC gy**

Part No. **43675.001.600**
 EAN **4251269327797**
 PU **1**
 For max. no. of cables **72**
 Colour **grau (ähnlich RAL 7035)**
 Length **221 mm**
 Width **90 mm**

Height **4 mm**
 Mounting height **4 mm**
 Cut-out size **192 x 62 mm**
 No. of screw holes **6**
 Diam. of screw holes **5,1 mm**
 Clamping range **42 x 3.2 - 6.5 mm**
21 x 5 - 10.2 mm
6 x 9 - 16.2 mm
3 x 16 - 22 mm

**KEL-DPZ-KX/KL 72 CR
bk**

Part No. **43675.101.601**
 EAN **4251269327926**
 PU **1**
 For max. no. of cables **72**
 Colour **schwarz**
 Length **221 mm**
 Width **90 mm**

Height **4 mm**
 Mounting height **4 mm**
 Cut-out size **192 x 62 mm**
 No. of screw holes **6**
 Diam. of screw holes **5,1 mm**
 Clamping range **42 x 3.2 - 6.5 mm**
21 x 5 - 10.2 mm
6 x 9 - 16.2 mm
3 x 16 - 22 mm

**KEL-DPZ-KX/KL 72 CR
(S)VOC bk**

Part No. **43675.101.600**
 EAN **4251269327803**
 PU **1**
 For max. no. of cables **72**
 Colour **schwarz**
 Length **221 mm**
 Width **90 mm**

Height **4 mm**
 Mounting height **4 mm**
 Cut-out size **192 x 62 mm**
 No. of screw holes **6**
 Diam. of screw holes **5,1 mm**
 Clamping range **42 x 3.2 - 6.5 mm**
21 x 5 - 10.2 mm
6 x 9 - 16.2 mm
3 x 16 - 22 mm

